


110Connect Category 6 Patch Panels

1375013-1, 1375014-1, 1375015-1, 1375016-1

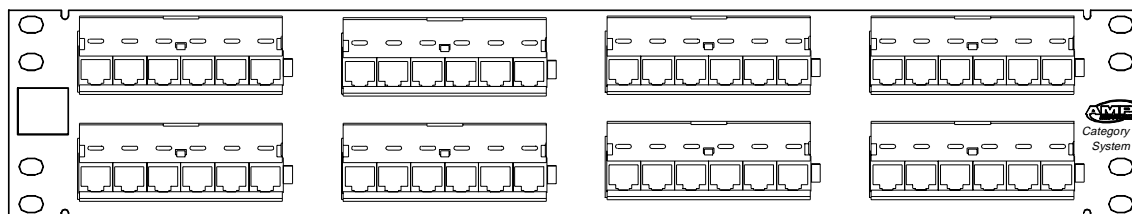

Description

AMP NETCONNECT Category 6 patch panels exceed TIA/EIA-568-B.2-1 and IEC 60603-7-4 requirements for Category 6 component performance. The AMP NETCONNECT Category 6 System complies with all of the performance requirements for current and proposed applications such as Gigabit Ethernet, 100BASE-Tx, token ring, 155 Mbps ATM, 100 Mbps TP-PMD, ISDN, analog (broadband, baseband) and digital video and analog and digital (VoIP) voice. The universal wiring label permits field installation to either T568A or T568B wiring while simplifying ordering and inventory. The "6-pack" modules accept 9mm and 12m labels (included) as well as color-coded icons. The jacks may be individually replaced if necessary.

Specification (Text in brackets [] requires a choice.)

Category 6 patch panels shall be [insert height] high and provide [insert number of ports] modular jack ports, wired to [T568A or T568B]. Patch panels shall be configured as 6-port modules with individually replaceable jacks. The front of each module shall be capable of accepting 9mm to 12mm labels. Each port shall be capable of accepting an icon to indicate its function. Patch panels shall terminate the building cabling on 110-style insulation displacement connectors. The installed system shall comply with the Category 6 performance characteristics listed in the following table [insert table from back page]. Patch panels must be UL Listed under file number E81956. Patch panels shall be AMP NETCONNECT part number [insert AMP NETCONNECT part number] or an approved equivalent.

Part Number	Number of Ports	Height, in.	Width, in.
1375013-1	12	10.015*	2.328
1375014-1	24	1.75	19
1375015-1	48	3.50	
1375016-1	96	7.00	

* Panel dimensions. Panel mounts vertically on 89D bracket (included).

110Connect Category 6 Patch Panels

1375013-1, 1375014-1, 1375015-1, 1375016-1

Worst-Case Performance Characteristics (exceed TIA (draft10) and IEC Category 6 requirements)

Freq. MHz	Insertion Loss, dB		Return Loss, dB		NEXT, dB		FEXT, dB	
	Spec	AMP	Spec	AMP	Spec	AMP	Spec	AMP
1	0.10	0.02	30	52.4	75.0	84.8	75.0	83.7
4	0.10	0.02	30	53.7	75.0	80.3	71.1	74.8
8	0.10	0.02	30	55.3	75.0	77.4	65.0	69.4
10	0.10	0.03	30	56.1	74.0	76.4	63.1	67.5
16	0.10	0.03	30	57.6	69.9	72.0	59.0	62.9
20	0.10	0.04	30	59.3	68.0	71.9	57.1	61.7
25	0.10	0.04	30	59.4	66.0	69.1	55.1	59.8
31.25	0.11	0.05	30	56.8	64.1	67.7	53.2	58.2
62.5	0.16	0.06	28	42.3	58.1	61.5	47.2	52.6
100	0.20	0.06	24	33.2	54.0	57.7	43.1	48.7
200	0.28	0.06	18	21.2	48.0	52.5	37.1	42.2
250	0.32	0.10	16	17.4	46.0	47.9	35.1	40.1

Durability:

Modular jack - 750 mating cycles

110 Block - 200 termination cycles

Materials:

Panel - black anodized aluminum (1375013 and 1375016)

black powder-coated steel (all others)

Jack housing - polyphenylene oxide, 94V-0 rated.

110 Blocks - polycarbonate, 94V-0 rated.

Jack contacts – beryllium copper, plated with 1.27 μm [.000050] thick gold in localized area and 3.81 μm [.000150] minimum thick tin-lead in solder area over 1.27 μm [.000050] minimum thick nickel underplate.

Packaging:

1375013-1 1 per box, 1 lbs.

1375014-1 1 per box/ 5 boxes per carton, 9 lbs.

1375015-1 1 per box/ 5 boxes per carton, 13 lbs.

1375016-1 1 per box, 4.26 lbs.

Approvals: UL File Number E81956

Specifications subject to change without notice.

Revised 1/02.

In the U.S. 1-800-553-0938

Canada 905-475-6222

Mexico 525-729-0400

South and Central Americas 54-11-4733-2200

www.ampnetconnect.com

e-mail: networking.help@tycoelectronics.com

© Copyright 2001 Tyco Electronics Corporation. All rights reserved.
AMP and NETCONNECT are trademarks.

tyco

Electronics

